

DCFC 4X4 QUICK CONNECT BASE

ABOUT


Shoals™ introduces the Quick Connect Base (QCB) for DC fast chargers to simplify the deployment of EV charging infrastructure. The Quick Connect Base works with the above-ground EV Raceway from Shoals to deploy EV charging infrastructure, eliminating the need for trenching and speeding up deployment.

FEATURES

- Used with Shoals EV Raceway for above ground installation
- Multiple configurations for transitioning between single- and double-stacked raceways
- Compatible with all major DC fast chargers
- Cable access through removable side plates
- Standard 5-year warranty on all models
- ETL Listed to UL67
- ETL Listed to CSA C22.2 #29 Panelboards and Enclosed Panelboards

OPTIONS

- Breakers for local overcurrent protection
- Can be mounted on concrete using concrete bolts or asphalt using earth screws
- 6" high lower profile base for ADA layouts
- Kit available for Seismic Design Category D or 160mph wind loading requirements

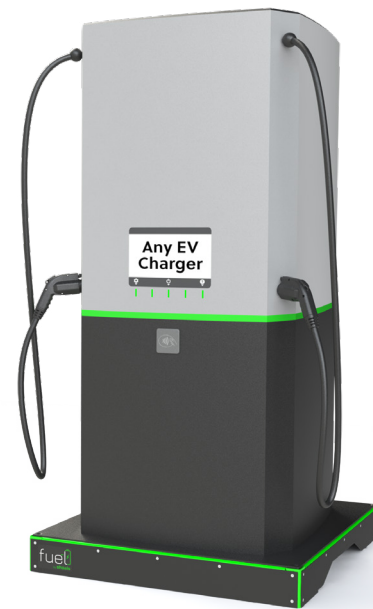

TECHNICAL SPECS	10" Tubular Steel		6" Tubular Steel	
Charger Weight Capacity	<1501 lbs	1501-3800 lbs	<1501 lbs	1501-3800 lbs
Dimensions (H x W x D)	10" x 48.22" x 48.22"	10" x 48.22" x 48.22"	6" x 48.22" x 48.22"	6" x 48.22" x 48.22"
Top Plate Thickness	0.25"	0.31"	0.25"	0.31"
Approx. QCB Weight	321 lbs	361 lbs	299 lbs	339 lbs
Ambient Temp. Range	-25°C to 50°C	-25°C to 50°C	-25°C to 50°C	-25°C to 50°C

Product design and specification subject to change or modification without notice.

